


PVC PROFILE

PRODUCT CATALOGUE

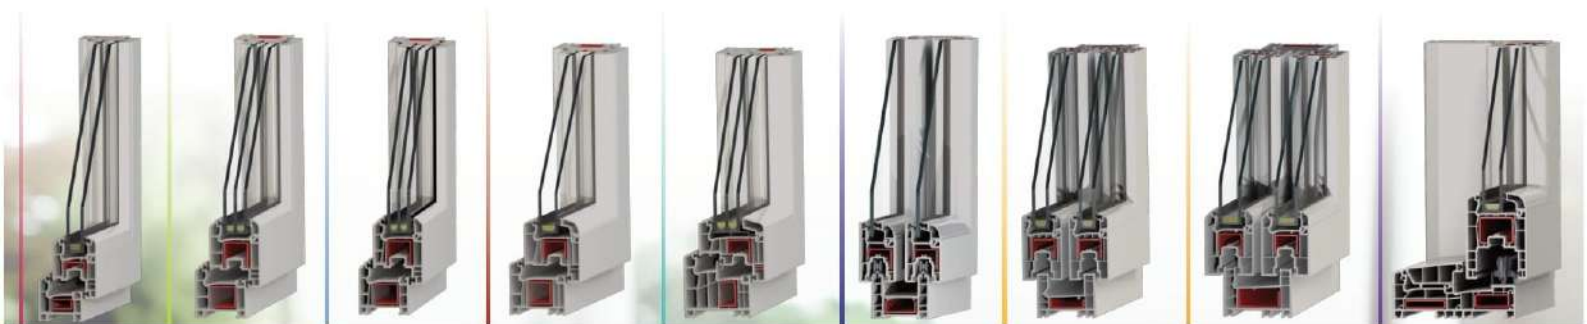

BLATZER

— WINDOW —

PVC



BLATZER
— WINDOW —
PVC

50 MM, 3 CHAMBERS

Product Description

Allows your area to get more light, makes room more bright.
Especially designed for use in narrow walls or containers.
Good appearance with round corner design, looks smooth and peaceful.
Easy to install with less weight, easy to move and installation.
It saves but not loss any function.

1. 50mm profile width
2. 3 Chambered system which improves insulation and durability
3. Decorative glazing bead with PCE gasket
4. External wall with 45° chamfer which prevents dust and dirt, provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standards
7. Between 4mm - 22mm glass application possibility
8. One-type reinforcement steel
9. One-type seal
10. Unlimited lamination color option



Lamination Colors

For more color, please contact with us!




Certificates


All products are under quality management system




TECHNICAL DRAWINGS

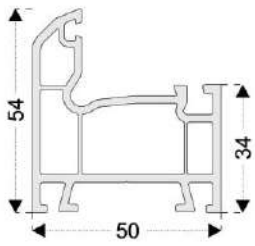


Frame Profile

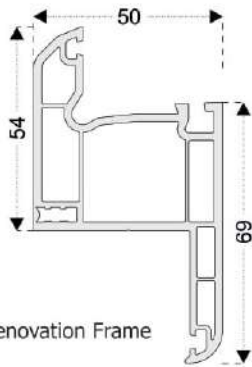


Renovation Frame

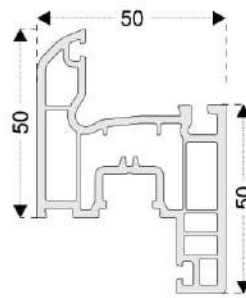


Sash Profile

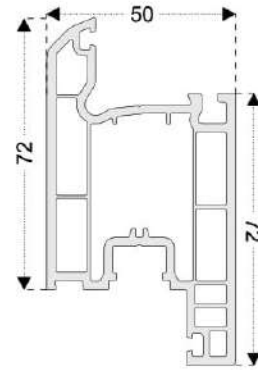


Inward Door Profile

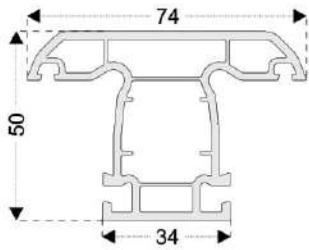


Mullion Profile

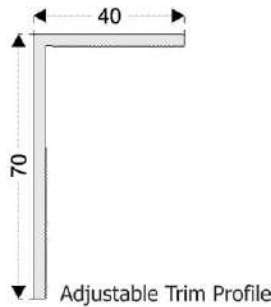

Adjustable Trim Profile




4-6 mm Single Glass G.Bead




20-22 mm Double Glass G.Bead


SECTION DETAILS

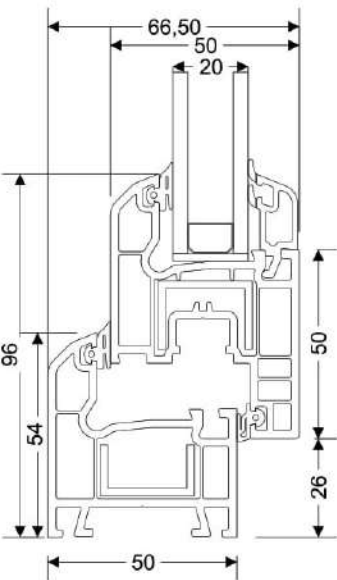


Frame - Sash

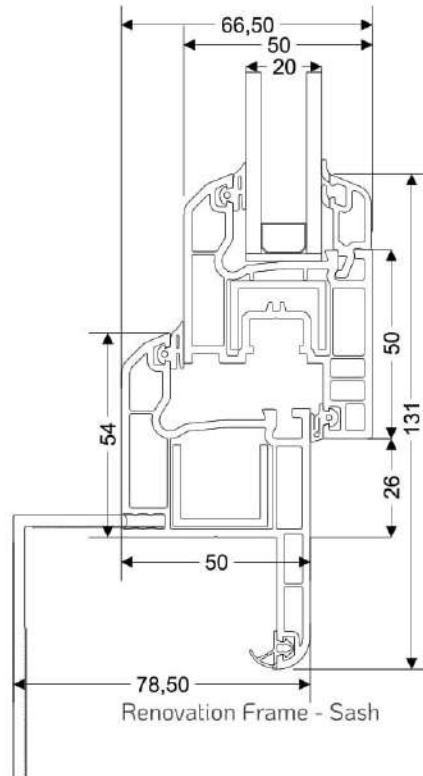

Renovation Frame - Sash

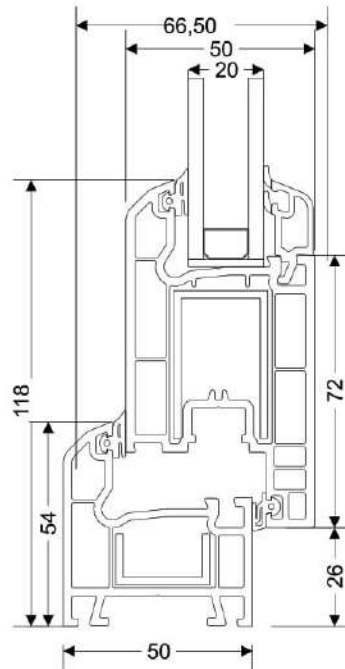

Frame - Inward Opening Door Sash

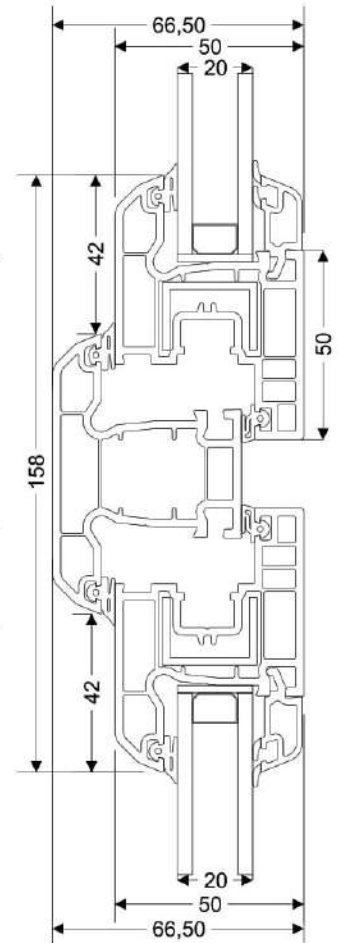

Sash - Mullion - Sash

60 MM, 4 CHAMBERS

Product Description

It is designed for more heat and sound insulation, meanwhile it has a decorative appearance and more elegant design than its counterparts. It adds value to your place. It has faultless and aesthetic desing that can cater to every taste with decorative and self-gasket glazing bead. Support aluminum threshold and many auxiliary profile, has functionality that you can use each project.

1. 60mm profile width
2. 4 Chambered system which improves insulation and durability
3. Decorative glazing bead with PCE gasket
4. External wall with 45° chamfer which prevents dust and dirt, provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standarts
7. Between 4mm - 30mm glass application possibility
8. One-type reinforcement steel
9. One-type seal
10. Unlimited lamination color option

Lamination Colors

For more color, please contact with us!



Certificates


All products are under quality management system






BLATZER
— WINDOW —
PVC


TECHNICAL DRAWINGS

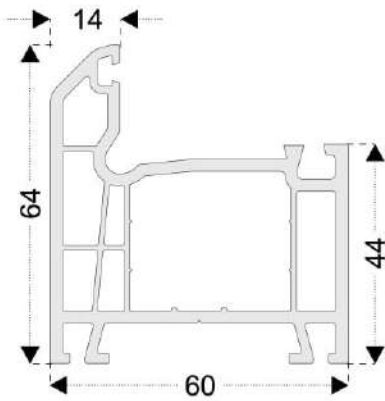


Frame Profile

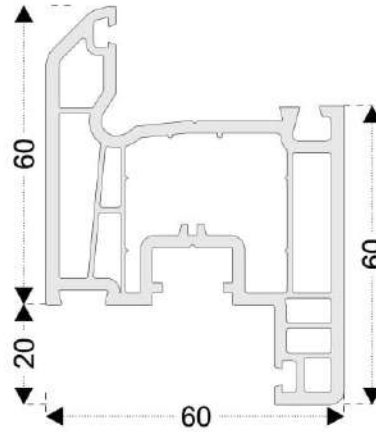


Sash Profile

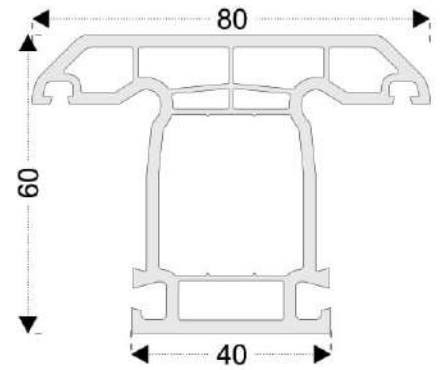


Mullion Profile

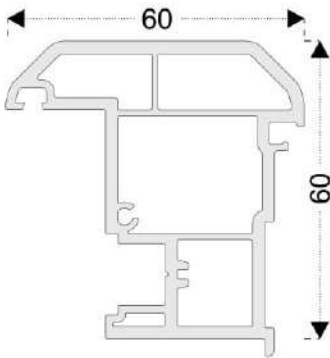

French Casement Mullion

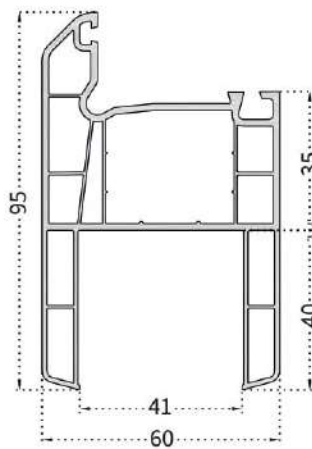


Container Frame Profile

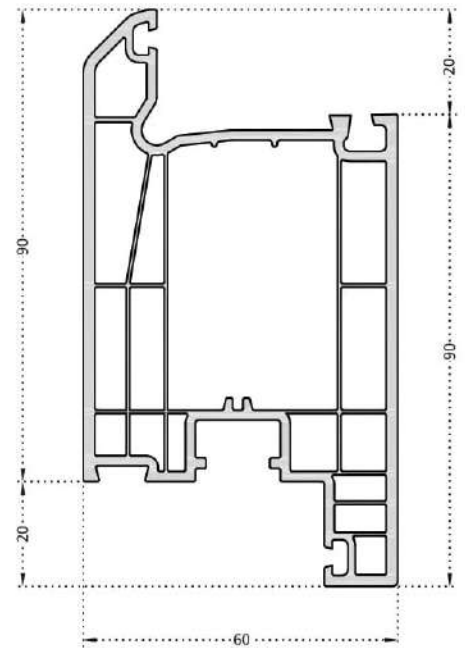


Door Sash




20-22 mm Double Glass G.Bead

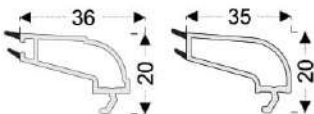


4-6 mm Single Glass G.Bead




28-30 mm Triple Glass G.Bead




24-26 mm Double Glass G.Bead




24-26 mm Double Glass G.Bead




8-10 mm Glazing Bead

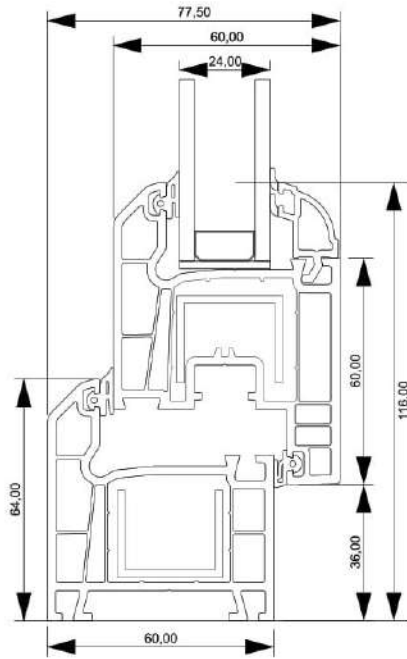

Frame - Sash

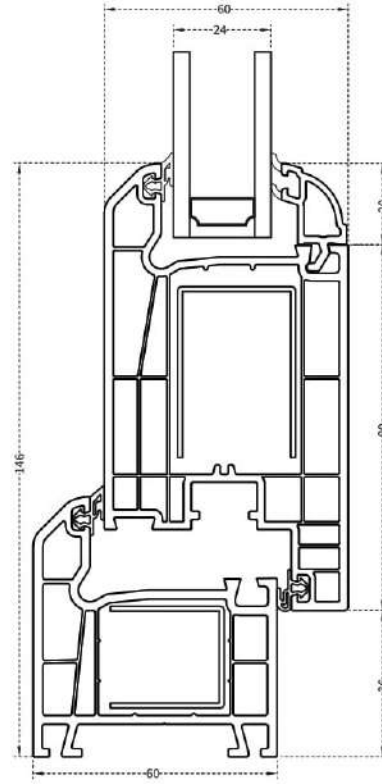

Frame - Inward Opening Door Sash

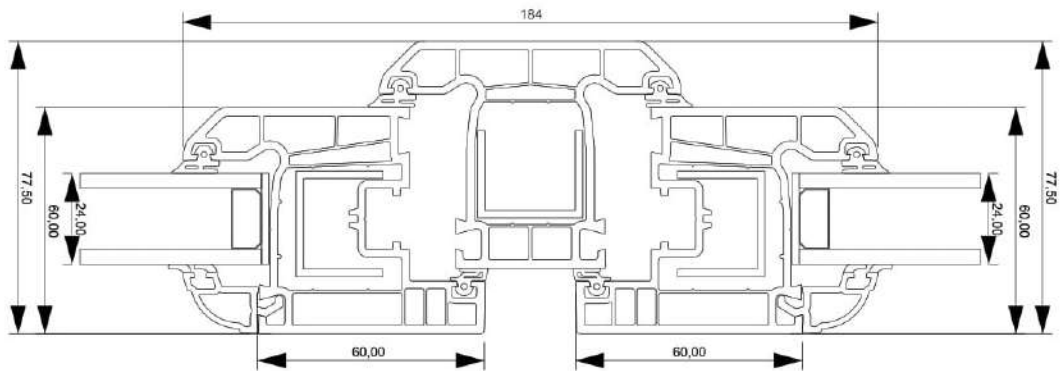

Sash - Mullion

70 MM, 5 CHAMBERS

Product Description

It is designed for high-rise buildings or projects where heat and sound insulation is important, meanwhile it has a decorative appearance and more elegant design than its counterparts. It adds value to your place. It has faultless and aesthetic desing that can cater to every taste with decorative and self-gasket glazing bead.

1. 70mm profile width
2. 5 Chambered system which improves insulation and durability
3. Decorative glazing bead with PCE gasket
4. External wall with 45° chamfer which prevents dust and dirt, provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in Europan Standarts
7. Between 4mm - 36mm glass application possibility
8. One-type reinforcement steel
9. One-type seal
10. Unlimited lamination color option

Lamination Colors

For more color, please contact with us!




Certificates

All products are under quality management system




**70 MM,
6 CHAMBERS
WITH STANDARD
AND DRAIN
SASH
OPTIONS**




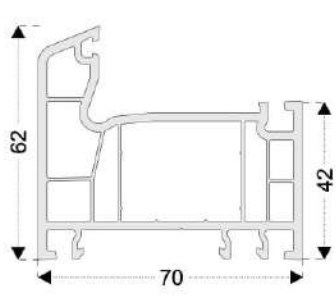


Frame Profile - 42mm

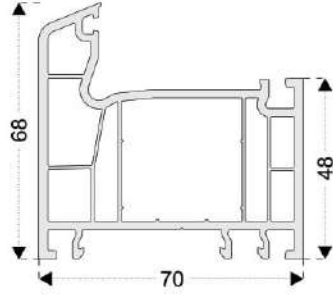


Frame Profile - 48mm

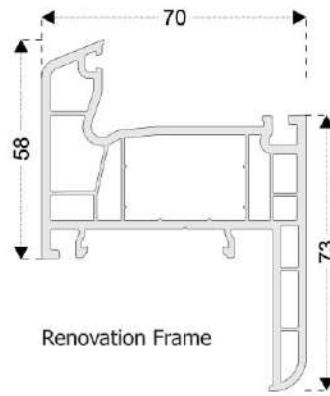


Renovation Frame

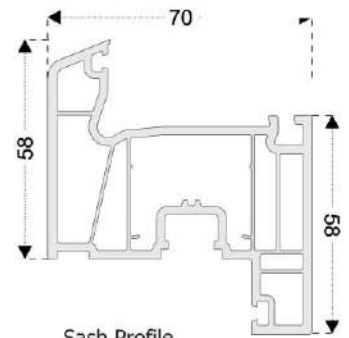


Sash Profile

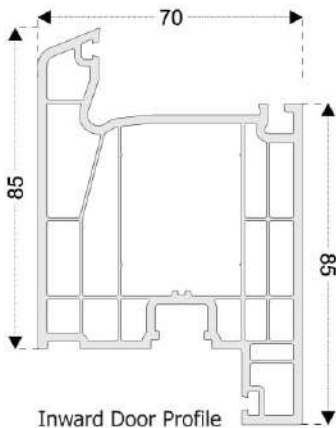


Inward Door Profile

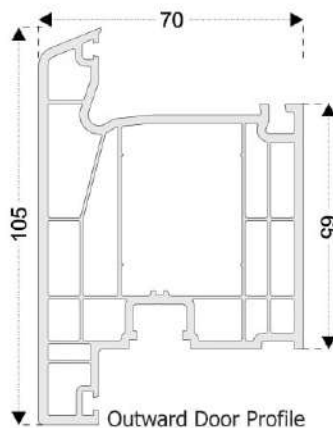


Outward Door Profile

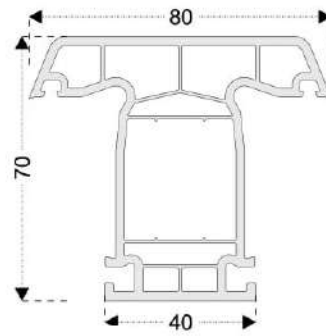


Mullion Profile

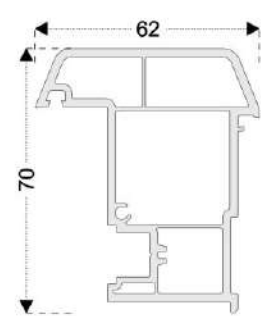


French Casement Mullion

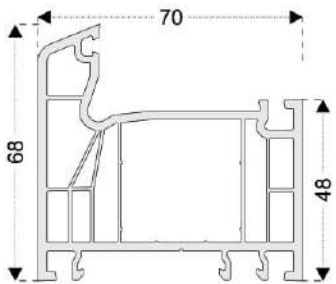


Frame Profile (6 Chambers)

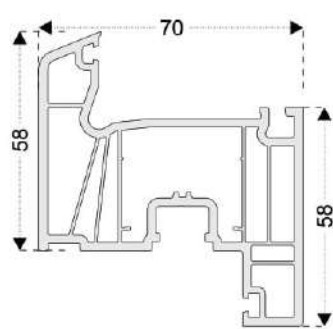


Sash Profile (6 Chambers)

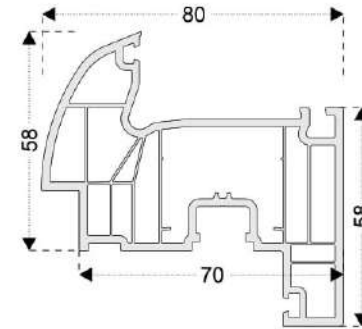


Drain Sash Profile (7 Chambers)

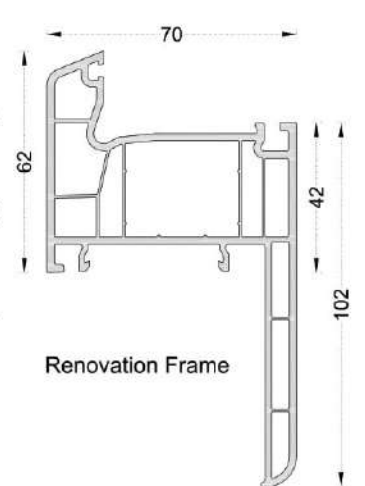


Renovation Frame

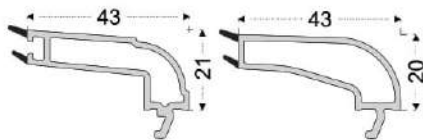

4-6 mm Single Glass G.Bead

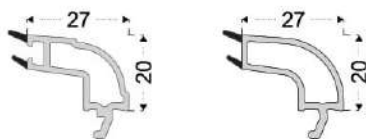

20-22 mm Double Glass G.Bead

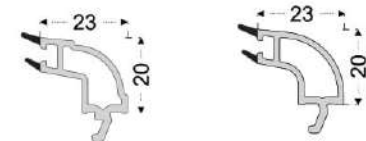


24-26 mm Double Glass G.Bead




32 mm Double Glass G.Bead

32 mm Double Glass G.Bead

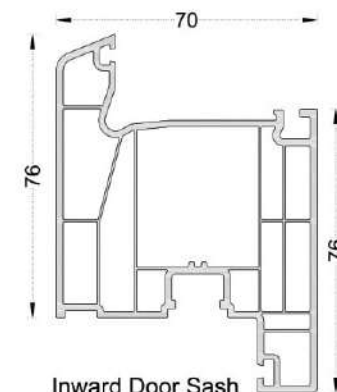


Inward Door Sash

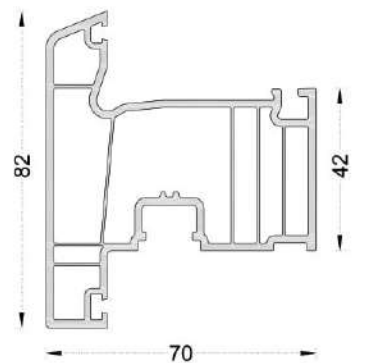


Outward Sash


SECTION DETAILS

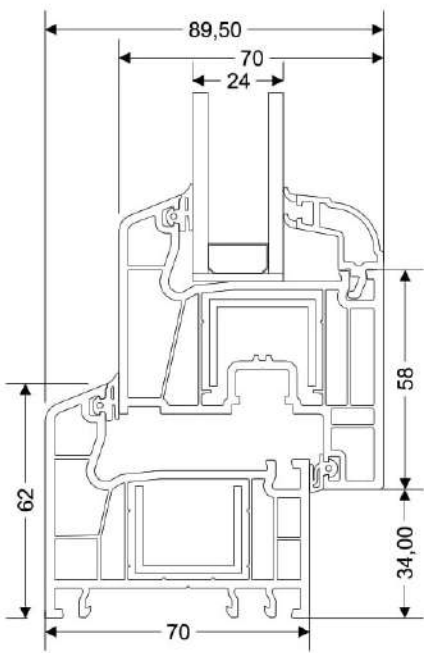


Frame 42mm - Sash

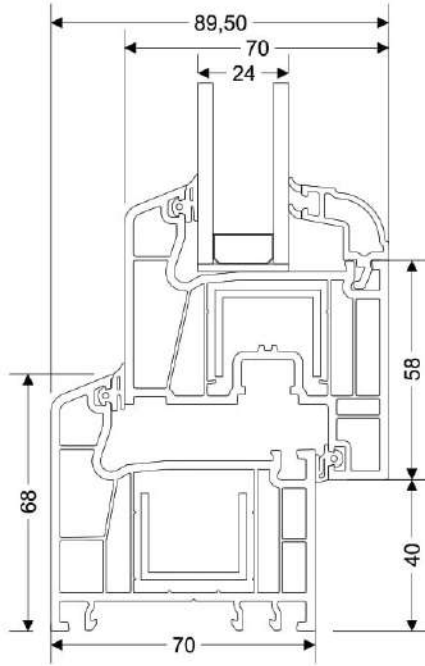


Frame 48mm - Sash

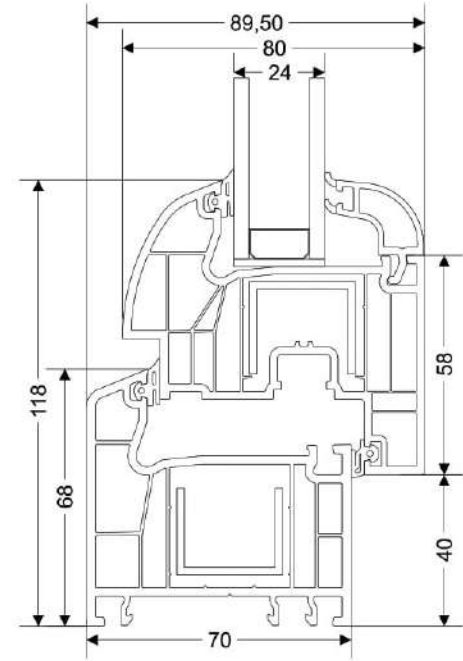


Frame - Drain Sash

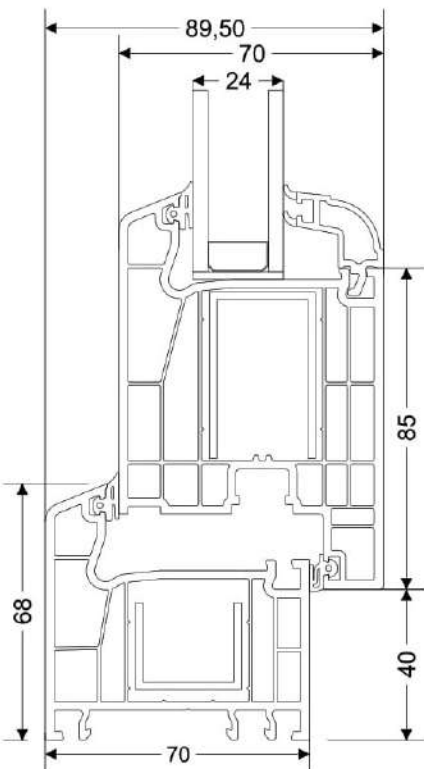

Frame - Inward Door Sash

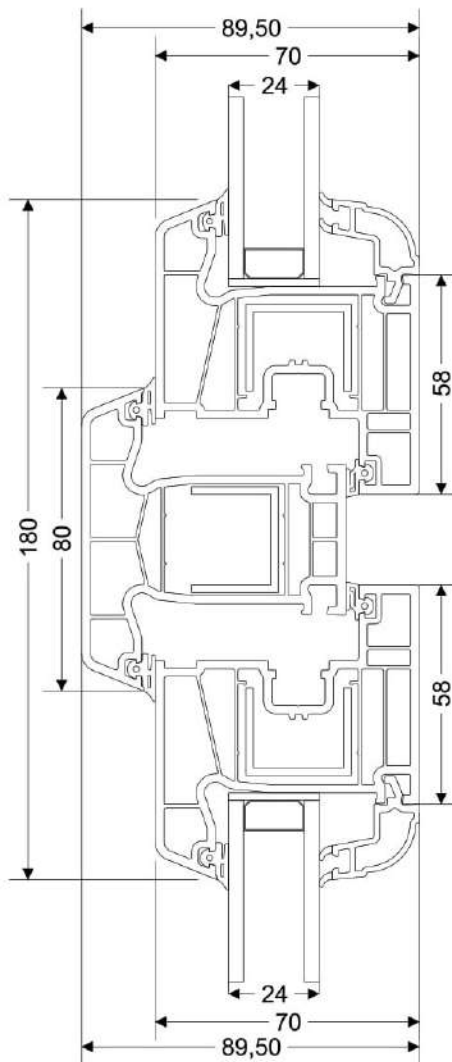

Sash - Mullion - Sash

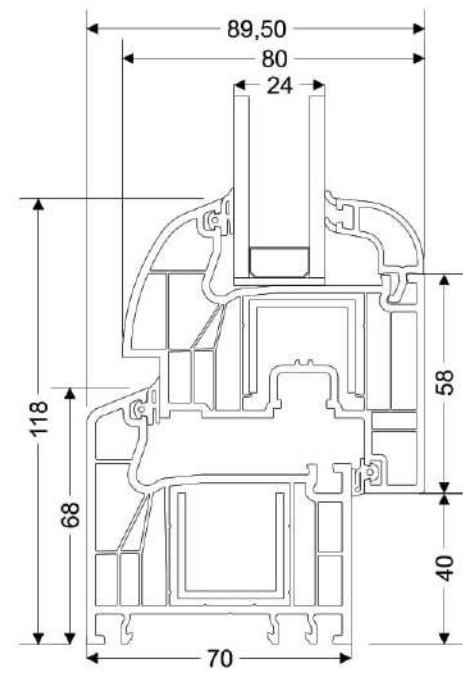

Frame (6 Chambers) - Drain Sash

81 MM, 6 CHAMBERS

Product Description

The well-considered design and geometry that combined with latest technologies to obtain excellent statics, long-term window function retention and hassle-free operation.

1. 81mm profile width
2. 6 Chambered system which improves insulation and durability
3. Decorative glazing bead with PCE gasket
4. External wall with 45° chamfer which prevents dust and dirt, provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standards
7. Between 24mm - 32mm glass application possibility
8. One-type reinforcement steel
9. One-type seal
10. Unlimited lamination color option

Lamination Colors

For more color, please contact with us!




Certificates


All products are under quality management system




TECHNICAL DRAWINGS

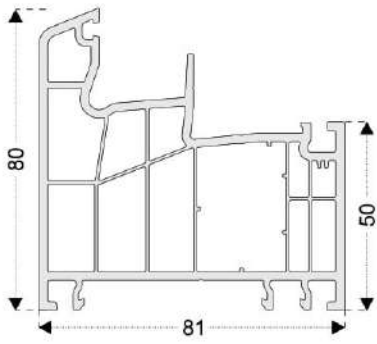


Frame Profile

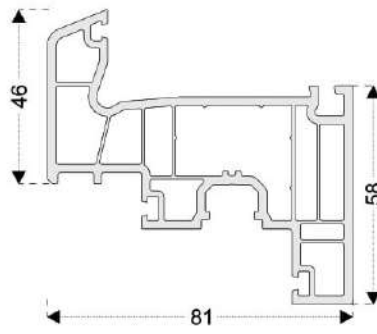


Sash Profile

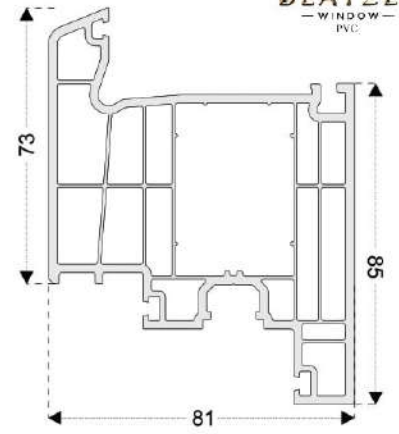


Inward Opening Door Profile

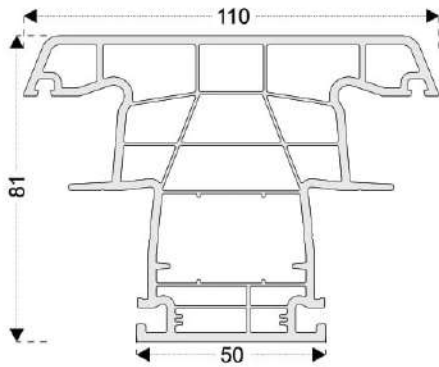

Mullion Profile

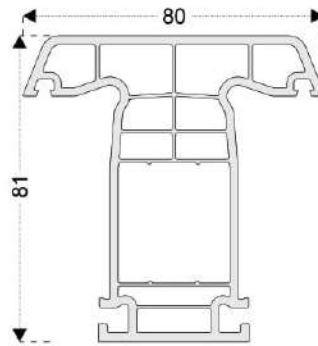

Mullion Profile

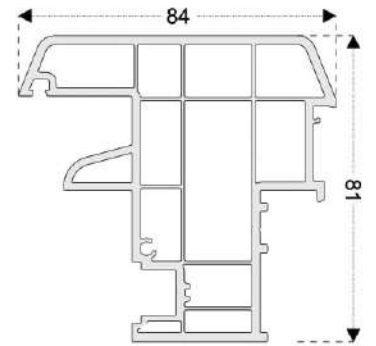

French Casement Mullion




32mm Triple Glass Glazing Bead for Sash Profiles




24mm Double Glass Glazing Bead for Sash Profiles




32mm Triple Glass Glazing Bead for Frame and Mullion Profiles

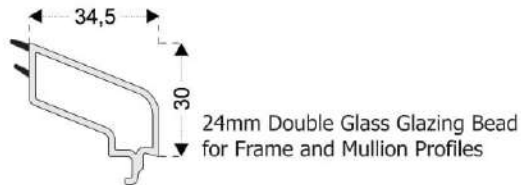

24mm Double Glass Glazing Bead for Frame and Mullion Profiles

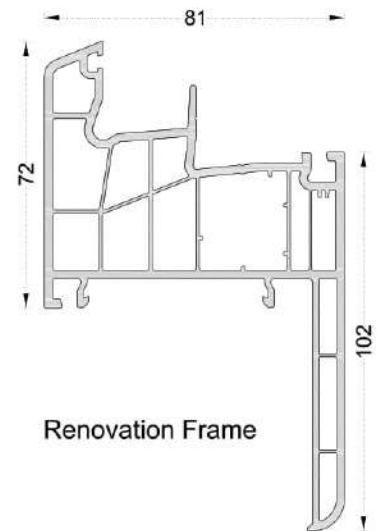


Renovation Frame

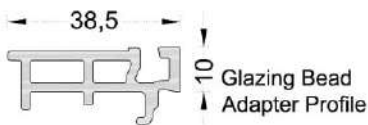


Glazing Bead Adapter Profile


81 Outward Door Sash

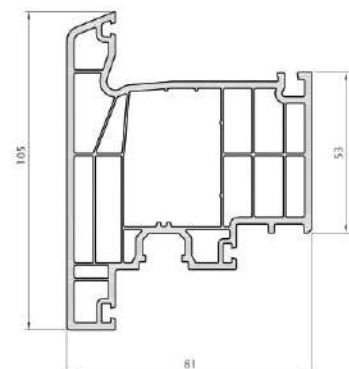


SECTION DETAILS

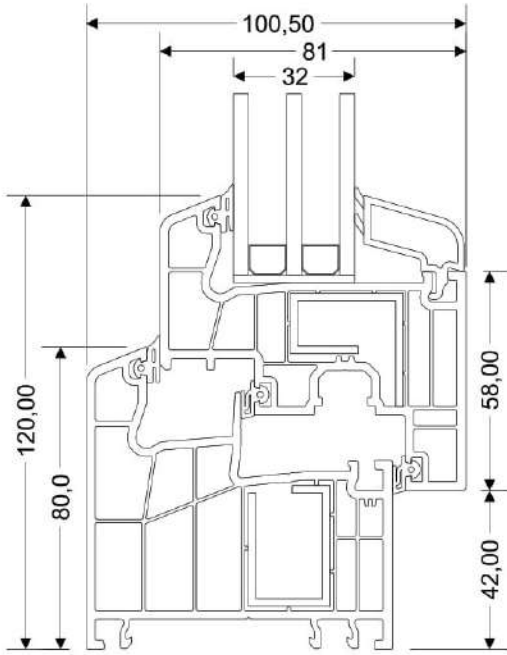


Frame - Sash

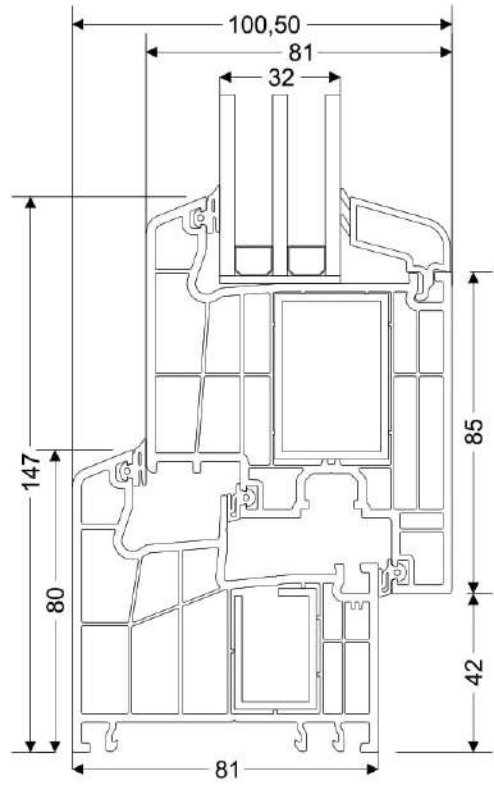

Frame - Inward Opening Door Sash

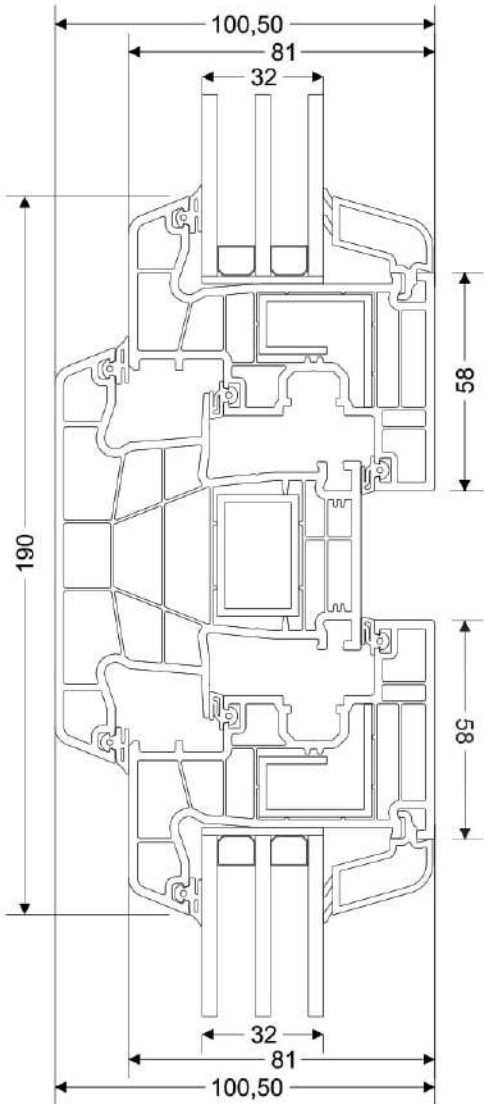

Sash - Mullion - Sash

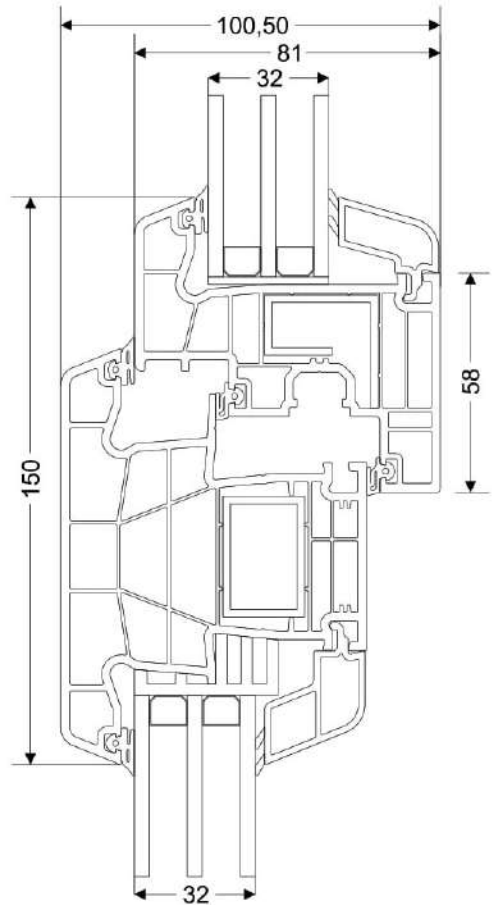

Mullion - Sash - Fix

SLIDE-60

60 MM

Product Description

Narrow frame and sash profiles provide a larger glass area, providing a better view of the outdoors. This is especially advantageous for places with views or in need of light. Sliding systems, on the other hand, increase usability in narrow spaces as they do not take up space when opening, thus saving space.

1. 60 mm profile width
2. Two type sash profile W: 38mm H:67 mm and W:38mm H:80mm
3. Inside and outside flynet application options.
4. decorative glazing bead with PCE gasket
5. Slope which provides maximum water disposal
6. External wall thickness in European Standarts
7. Between 4 mm - 16 mm glass application possibility
8. Unlimited lamination color option



Lamination Colors


For more color, please contact with us!




Certificates

All products are under quality management system




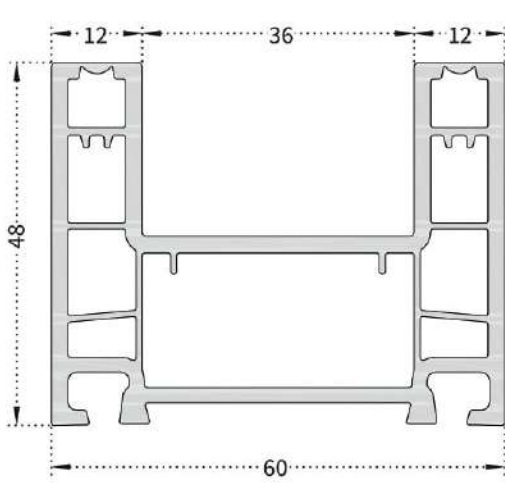


60mm Sliding Frame

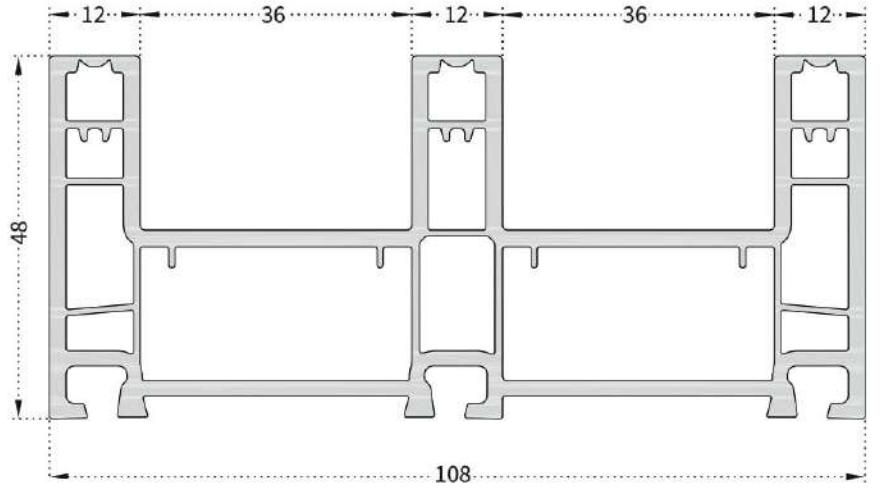


60mm Triple Sliding Frame

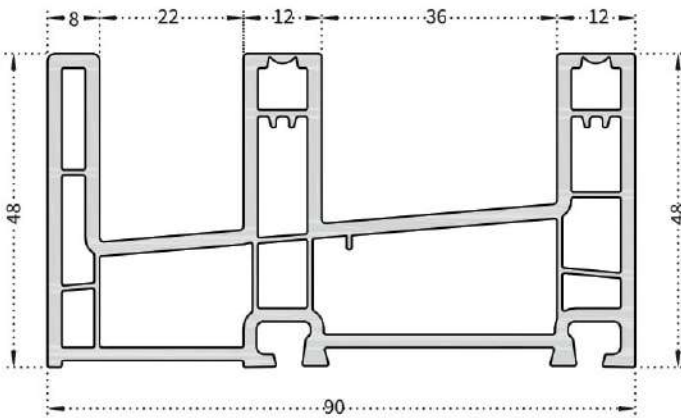


60mm Sliding Frame With Flynet (Flynet Outside)

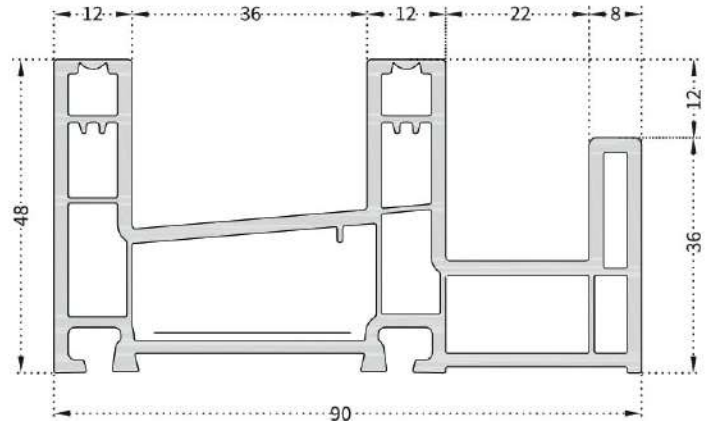


60mm Sliding Frame With Flynet (Flynet Inside)

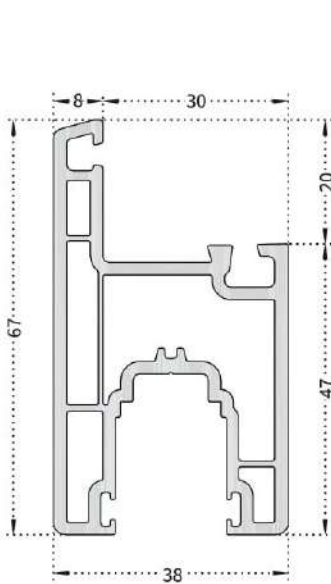


60mm Sliding Sash (67 Mm)

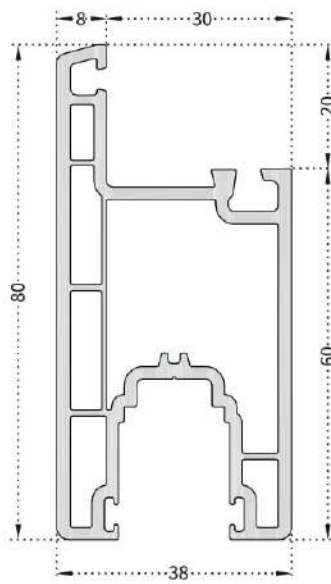


60mm Sliding Sash (80 Mm)

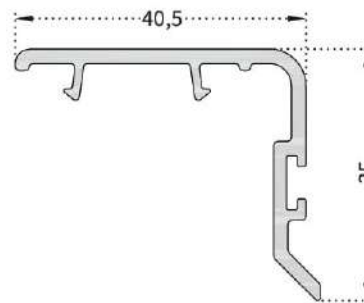


60mm Sliding Sash Adapter

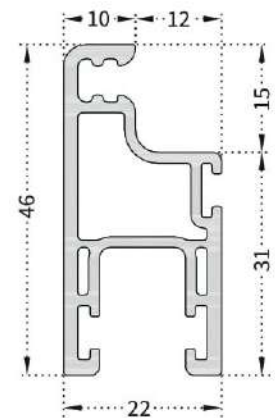


60mm Sliding Flynet Sash



60mm SLIDING
4mm Glazing Bead




60mm SLIDING
12mm Glazing Bead




60mm SLIDING
16mm Glazing Bead

SLIDE-60


SECTION DETAILS

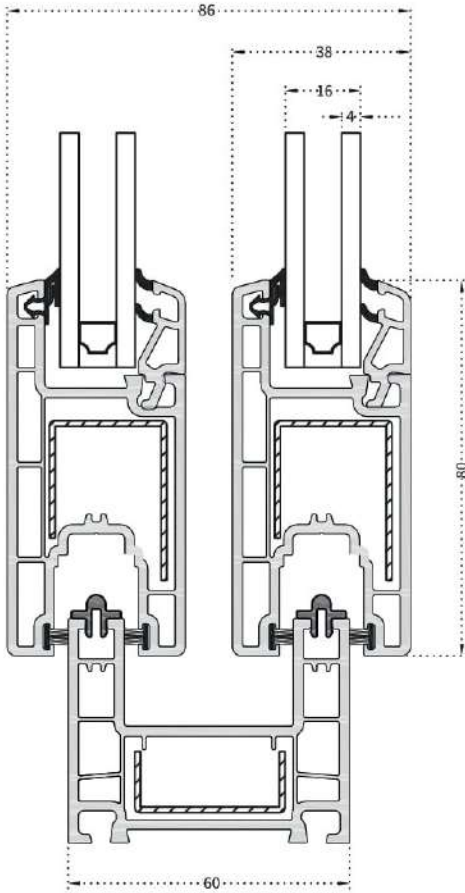


Double Sliding Frame - Sliding Sash 80 mm

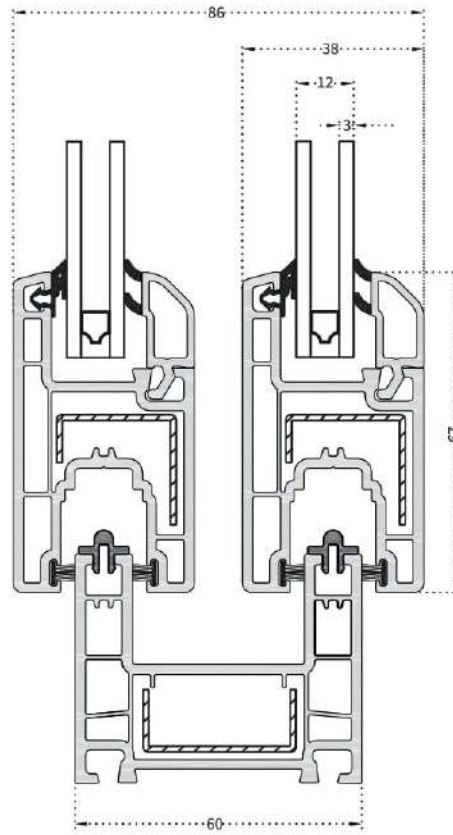

Double Sliding Frame - Sliding Sash 67 mm

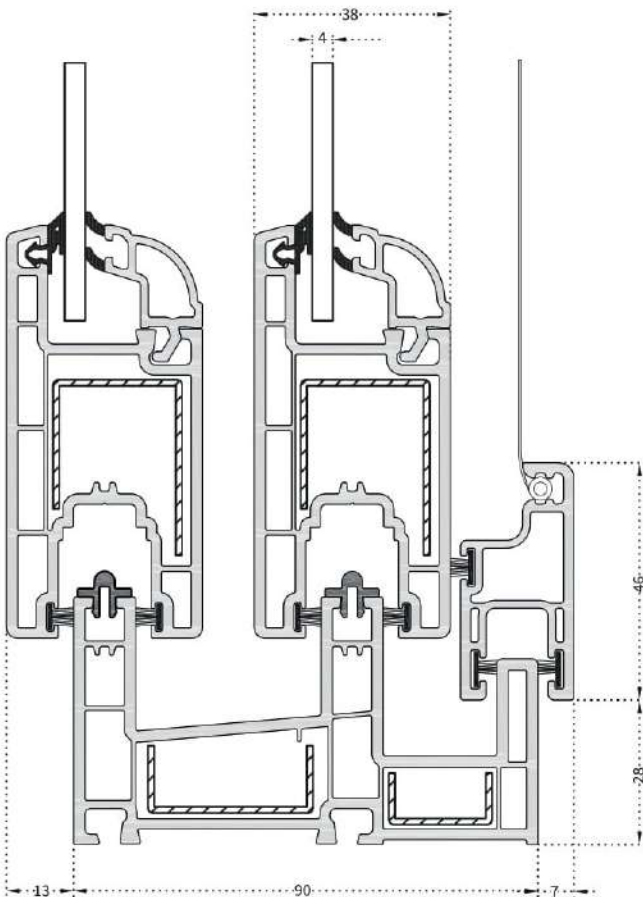

Double Sliding Frame - Sliding Sash with Inside Flynet

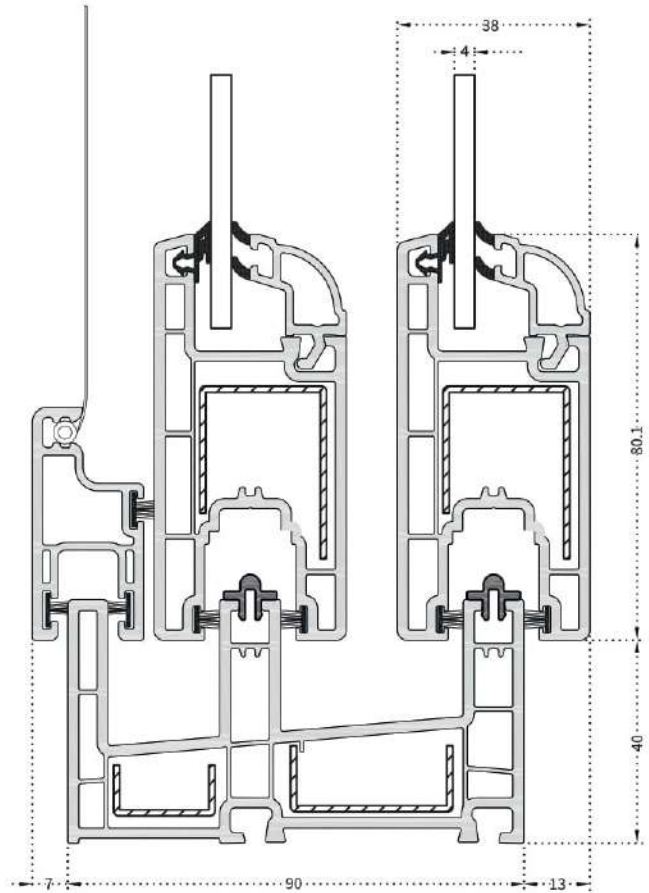

Double Sliding Frame - Sliding Sash with Outside Flynet

SLIDE-70

70 MM, 3 CHAMBERS

Product Description

It is designed to be used in projects which sliding window and door needed, meanwhile it has a decorative appearance and more elegant design than its counterparts. It adds value to your place. Through to the closed rail ducts, it remain clean for a long time. Produced with TPE gasket and self-gasket provides sealing with corner welds.

1. Two type sash profile W:48mm H:80mm and W:48mm H:100mm
2. 3 Chambered system which improves insulation and durability
3. Decorative glazing bead with PCE gasket
4. External wall with 45° chamfer which prevents dust and dirt, provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standarts
7. Between 4mm - 22mm glass application possibility
8. One-type reinforcement steel
9. One-type seal
10. Unlimited lamination color option

Lamination Colors


For more color, please contact with us!




Certificates

All products are under quality management system




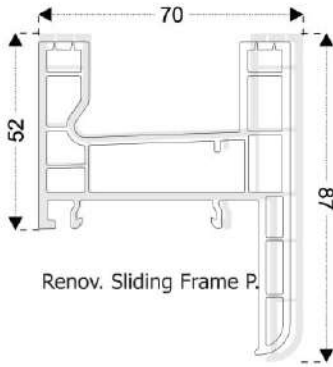


Renov. Sliding Frame P.

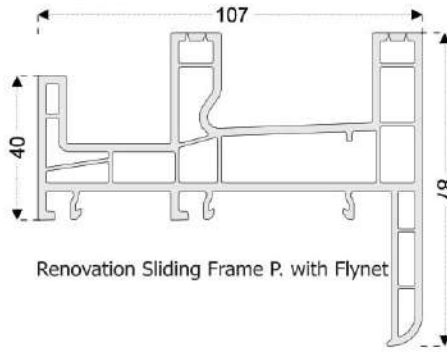


Renovation Sliding Frame P. with Flynet

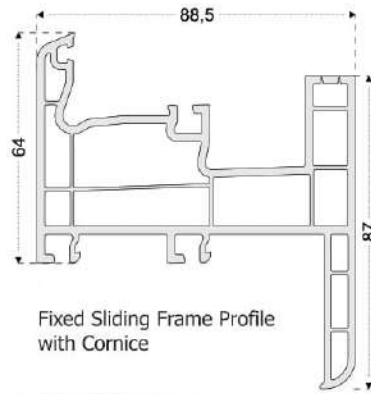


Fixed Sliding Frame Profile with Cornice




Fixed Sliding Frame Trim Profile (Alum.)

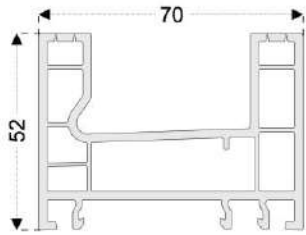


Sliding Frame Profile

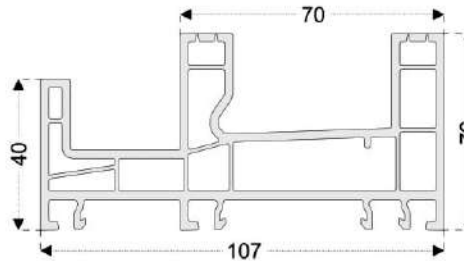


Sliding Frame Profile with Flynet

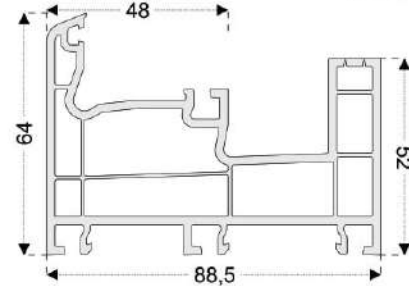


Fixed Sliding Frame Profile




Sliding Sash Profile Locking Plate (Alum.)

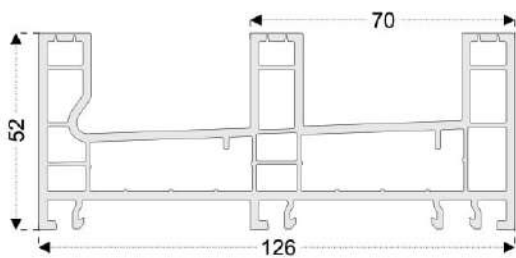


Triple Sliding Frame Profile

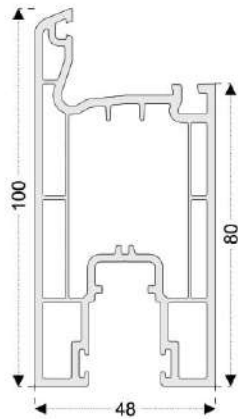


Sliding Door Sash Profile

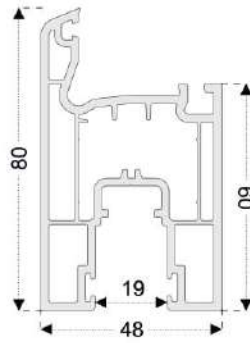


Sliding Door Sash Profile

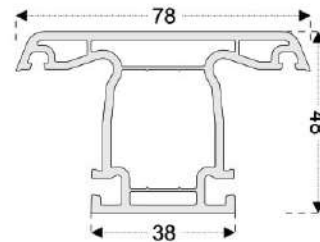


Mullion Profile

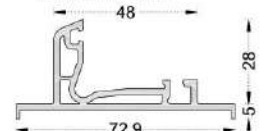


Sliding Frame Fix Adapter




Sliding Flynet Sash Profile




Flynet Mullion Profile



Flynet Rail Profile

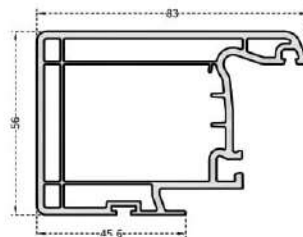


70mm Fixed Sliding Mullion




70mm Fixed Sliding Mullion Adapter




Sliding Rail Profile (Alum.)




Sliding Sash Profile Adapter




Sliding Sash Profile Adapter



Fixed Sliding Frame Closing Profile

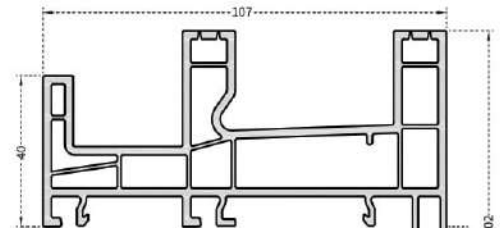

Sliding Frame With Flynet

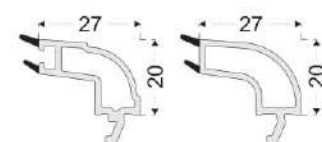


4-6 mm Single Glass Glazing Bead




20-22 mm Double Glass Glazing Bead




24 mm Double Glass Glazing Bead

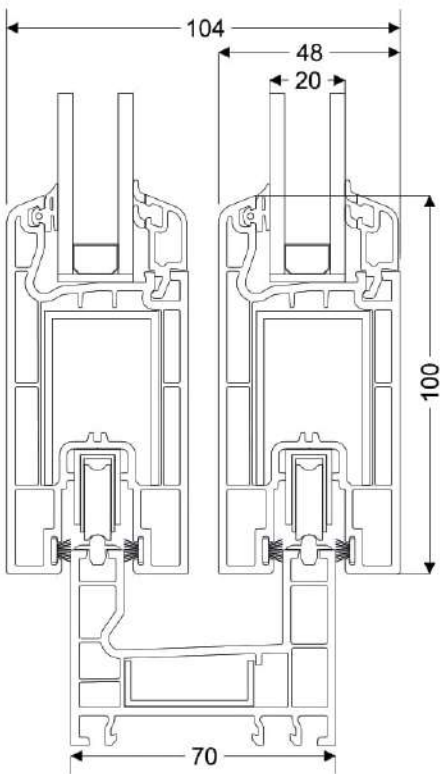


Double Sliding Frame - Sliding Sash

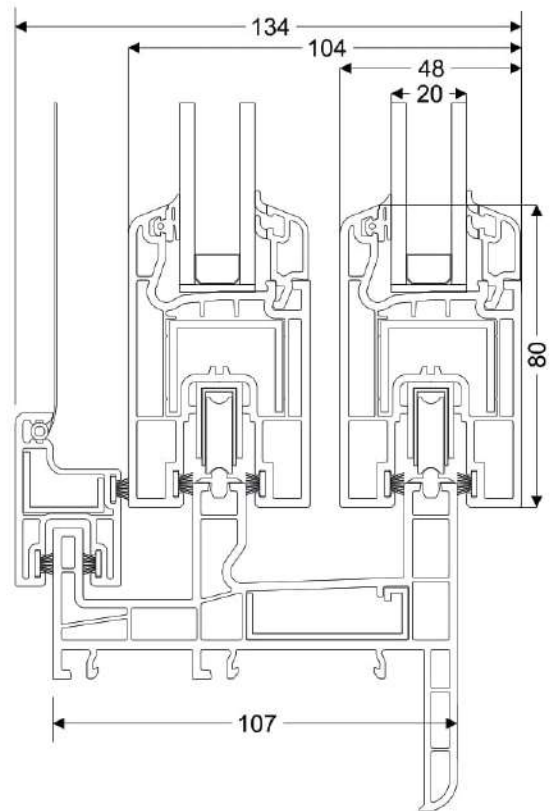

Double Sliding Frame - Sliding Sash with Flynet

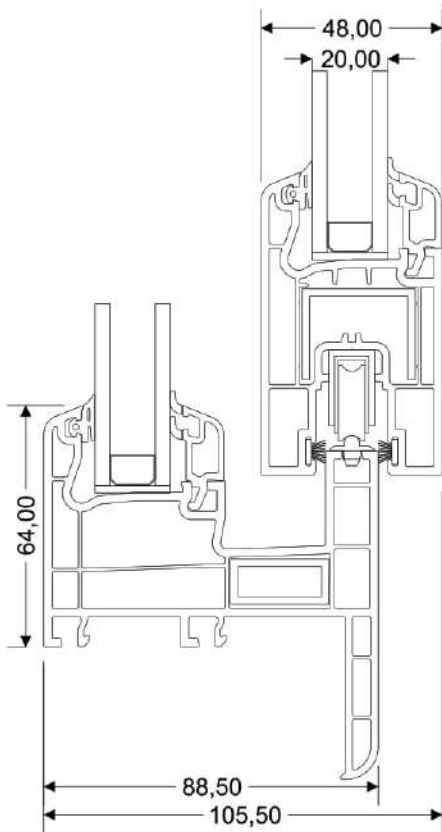

Fixed Sliding Frame - Sliding Sash

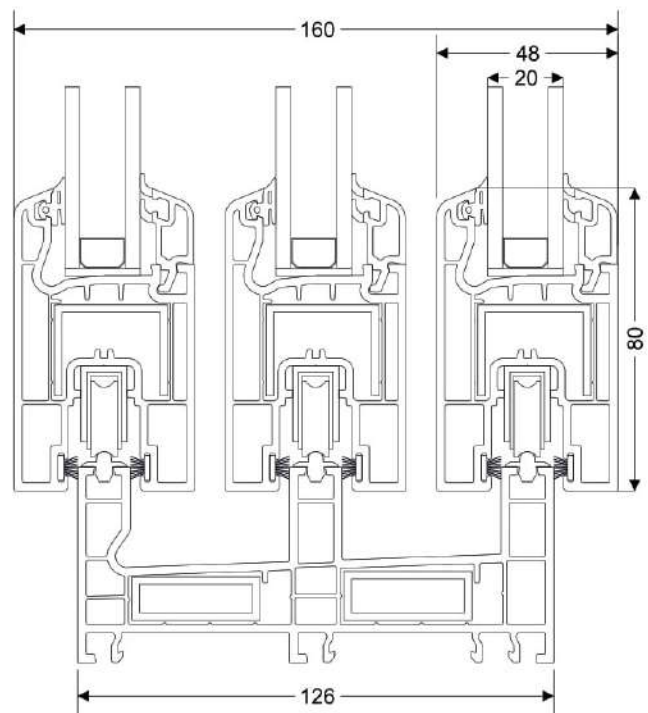

Triple Sliding Frame - Sliding Sash

SLIDE-84

84 MM, 3 CHAMBERS

Product Description

It is designed to be used in projects which sliding window and door needed, meanwhile it has a decorative appearance and more elegant design than its counterparts. It adds value to your place. Through to the closed rail ducts, it remain clean for a long time.

Produced with TPE gasket and self-gasket provides sealing with corner welds.

1. Two type sash profile W:60mm H:80mm, W:60mm H:100mm
2. 3 Chambered system which improves insulation, durability
3. Decorative glazing bead with PCE gasket
4. External wall with 45° chamfer which prevents dust and dirt, provides aesthetic appearance
5. Slope which provides maximum water disposal
6. External wall thickness in European Standarts
7. Between 4mm - 30mm glass application possibility
8. One-type reinforcement steel
9. One-type seal
10. Unlimited lamination color option

Lamination Colors


For more color, please contact with us!




Certificates

All products are under quality management system




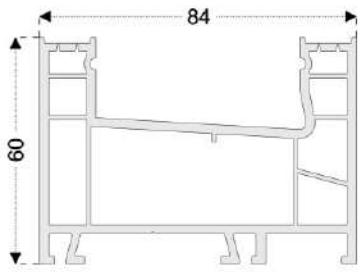


Sliding Frame Profile

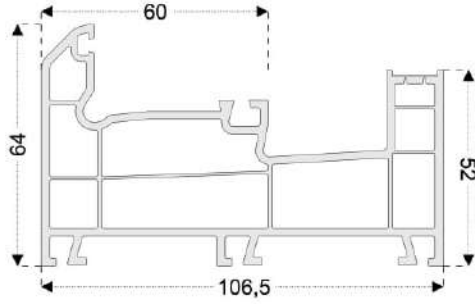


Fixed Sliding Frame Profile

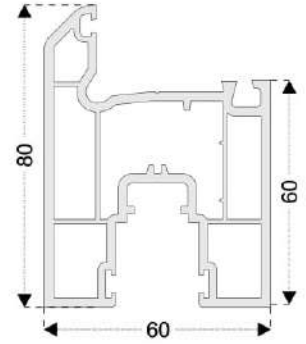


Sliding Door Sash Profile

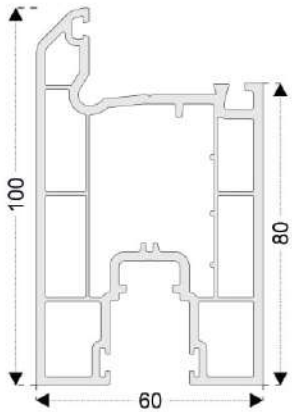


Sliding Door Sash Profile

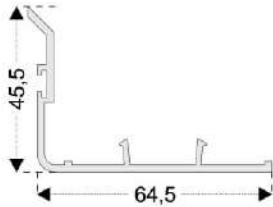


Sliding Sash Profile Adapter

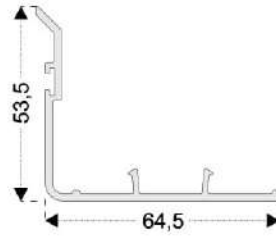


Sliding Sash Profile Adapter

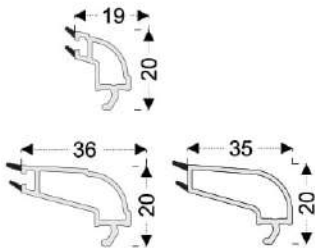


20-22 mm Double Glass G.Bead

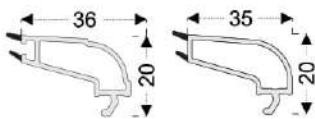


4-6 mm Single Glass G.Bead




28-30 mm Triple Glass G.Bead




24-26 mm Double Glass G.Bead

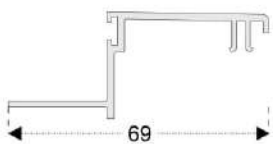

Double Sliding Frame Trim Profile (Alum.)

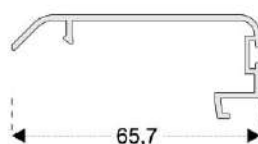


Fixed Sliding Frame Trim Profile (Alum.)




Sliding Sash Profile Locking Plate (Alum.)




Sliding Rail Profile (Alum.)

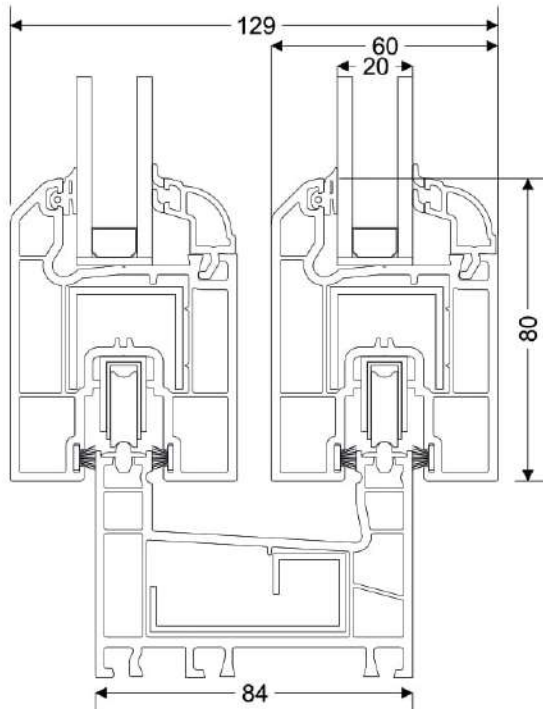

Sliding Frame - Sliding Sash 80mm

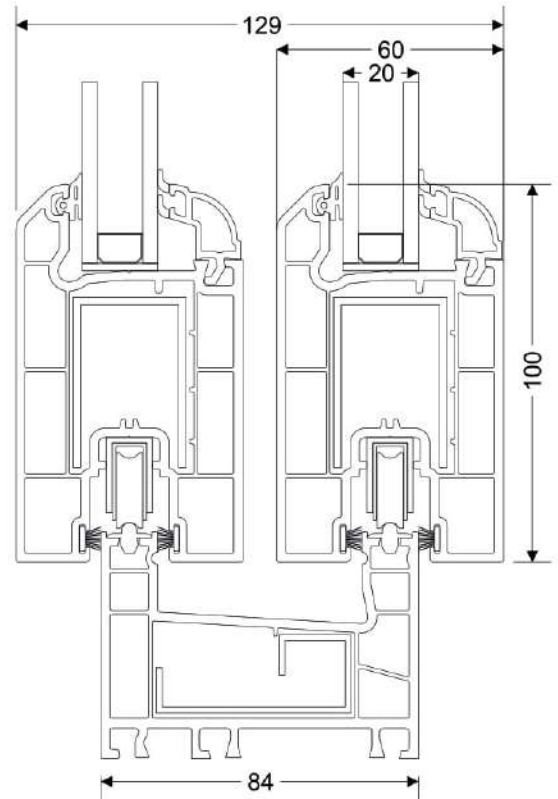

Sliding Frame - Sliding Sash 100mm

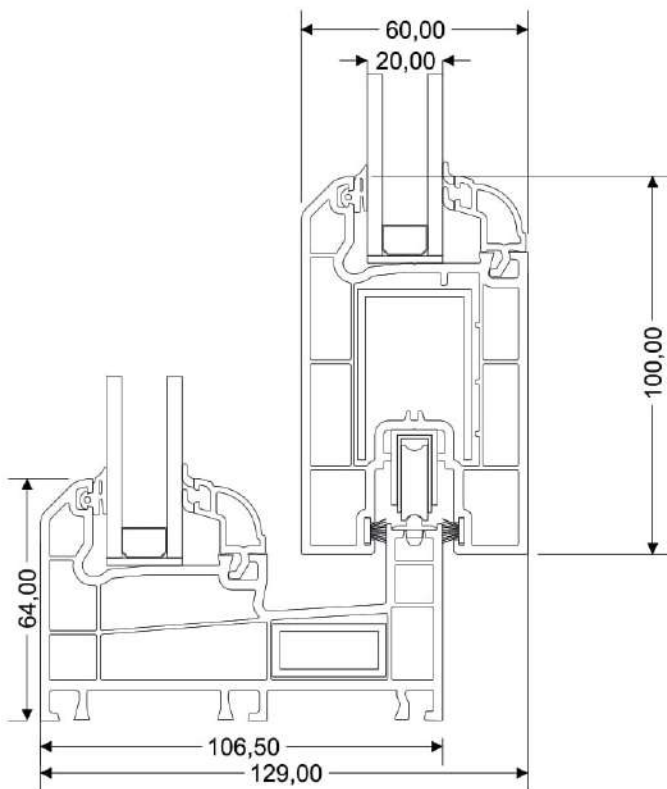

Fixed Sliding Frame - Sliding Sash

SLIDE INSULATED SLIDING SYSTEM

140 MM

Product Description

Our insulated sliding system provides excellent sound and heat insulation thanks to its 140 mm wide special frame and the specially developed in Europe for this system.

The Sashes close tightly on the frame with the special in European system, providing high security.

It offers a wide and uninterrupted view thanks to its large glass surfaces.

1. 140 mm profile width
2. Decorative glazing bead with PCE gasket
3. Slope which provides maximum water disposal
4. External wall thickness in European Standards
5. Between 4 mm - 36 mm glass application possibility
6. Unlimited lamination color option



Lamination Colors

For more color, please contact with us!



Certificates

All products are under quality management system




SLIDE INSULATED SLIDING SYSTEM


TECHNICAL DRAWINGS




BLATZER
— WINDOW —
PVC

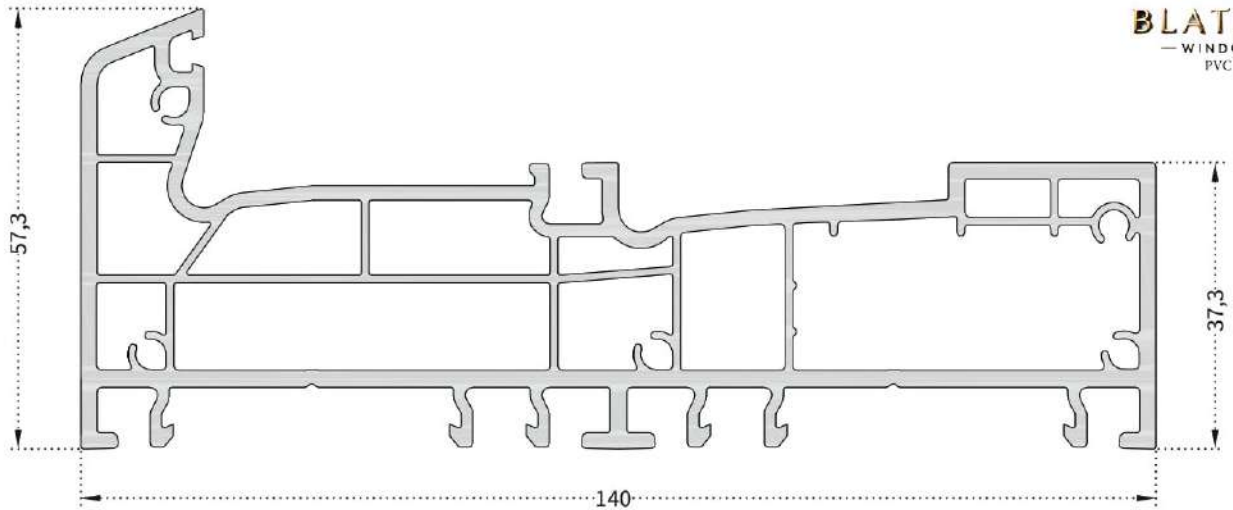


Sliding Frame

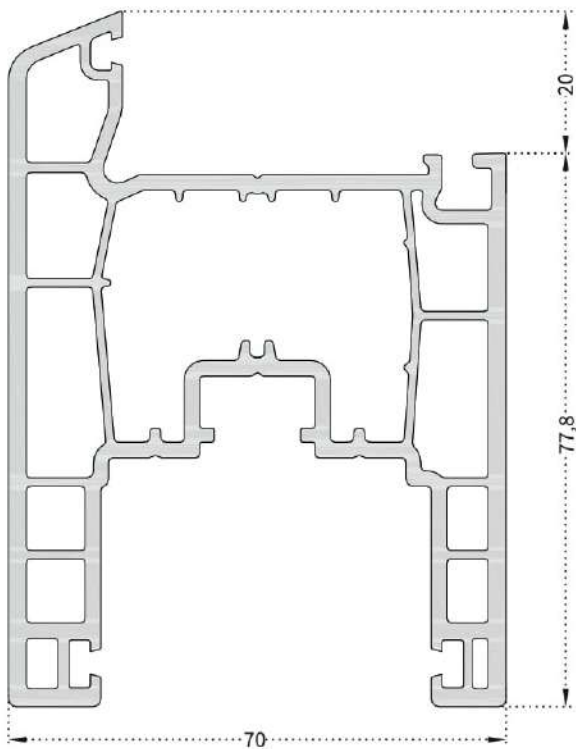


Sliding Sash

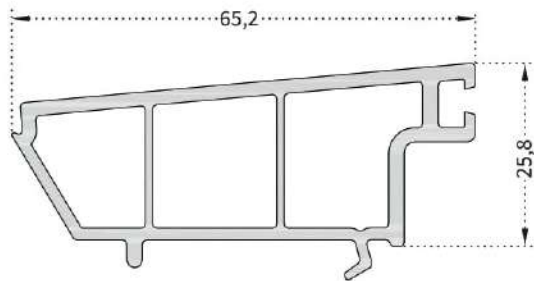

Sliding frame closing profile

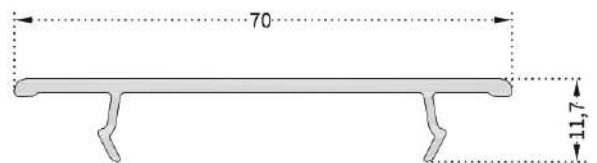


Sliding Sash Profile Adapter

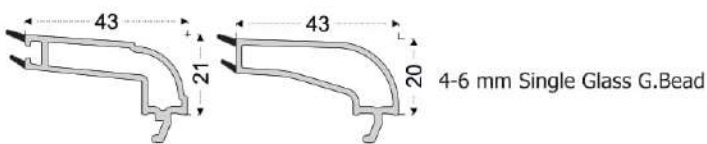


4-6 mm Single Glass G.Bead




20-22 mm Double Glass G.Bead



24-26 mm Double Glass G.Bead



32 mm Double Glass G.Bead




32 mm Double Glass G.Bead




36 mm Double
Glass Glazing Bead

SLIDE INSULATED SLIDING SYSTEM



SECTION DETAILS

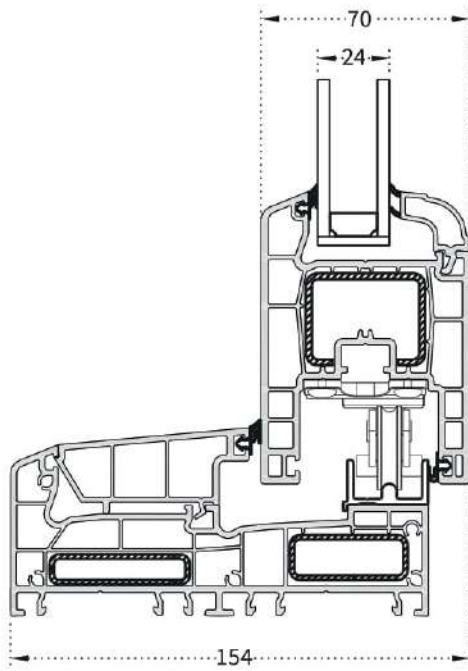




Closed Position

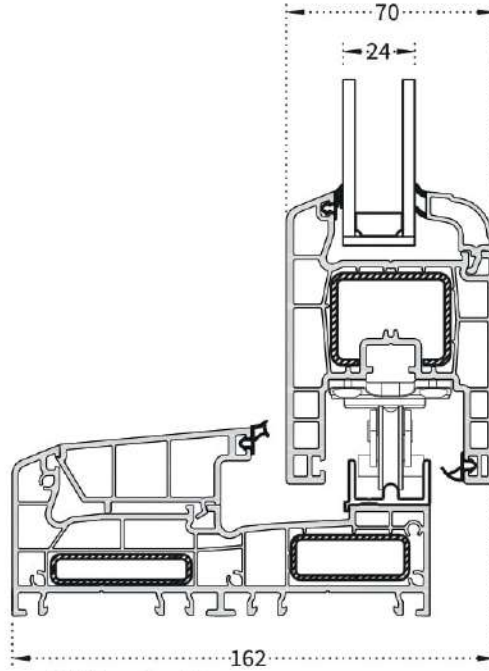


Sliding Position

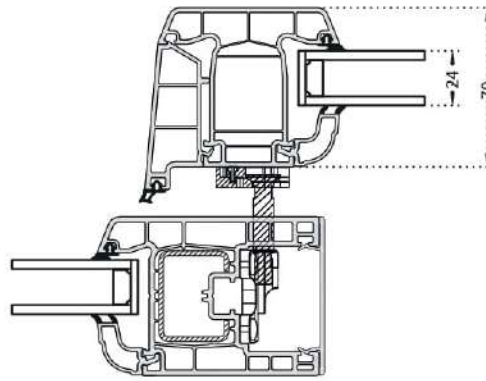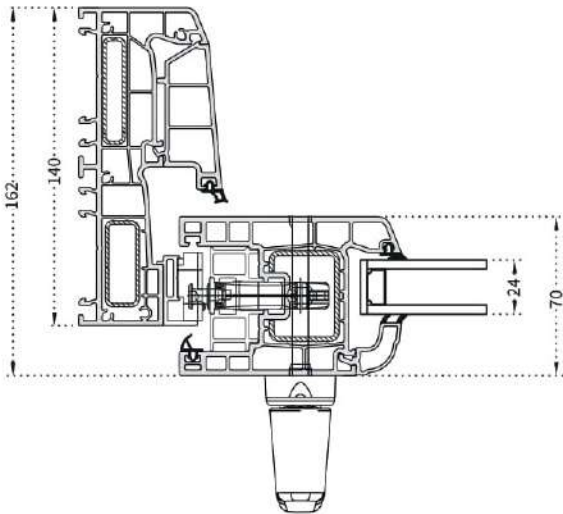

Sliding Position

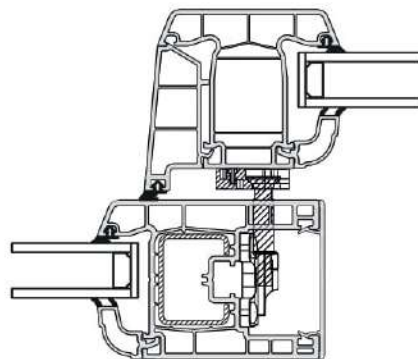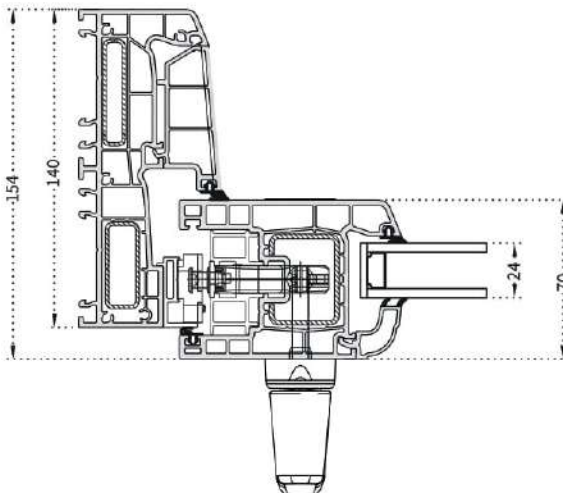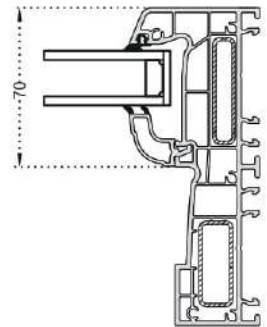


Closed Position

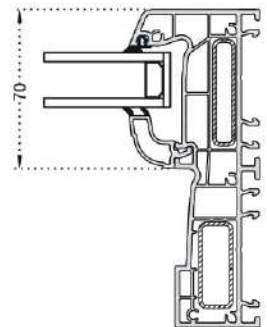


SLIDE INSULATED SLIDING SYSTEM

TECHNICAL DRAWINGS

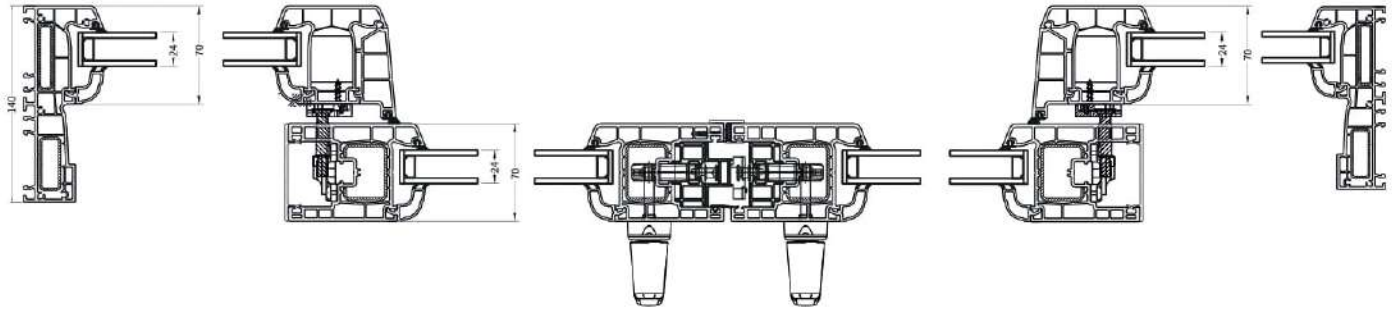

Double Sash Closed Position

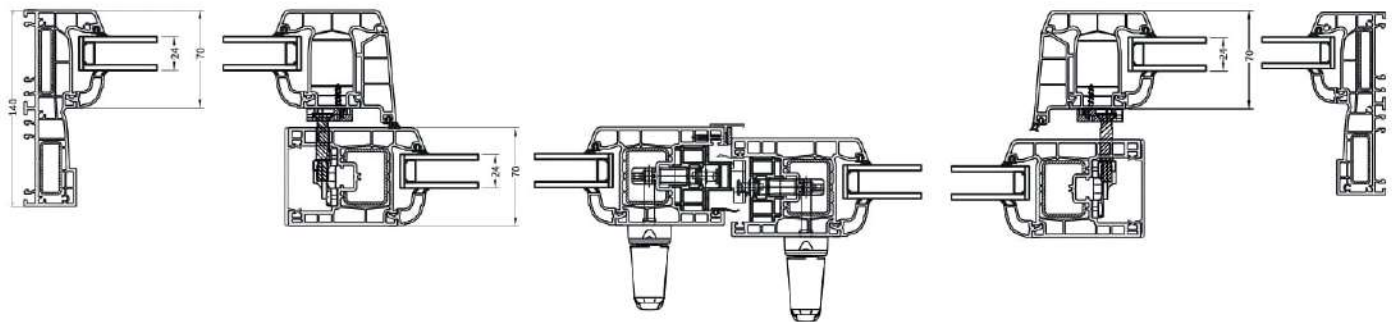

Double Sash Sliding Position



BLATZER
— WINDOW —
PVC

Web: www.andridorgrup.com

E-mail: andridorgroup@gmail.com

Phone:

Republic of Moldova: +373 68 488 807

United States Of America: +1 508 290 8689